

## Product information | TECHNICAL DATA SHEET

**SPEED. Solid Colors.** Matte paint, high pressure, high opacity and fast drying.  
400 ml, 11.3 Oz, 320 g

### GENERAL DESCRIPTION

Speed is a matte spray paint with high pressure and high opacity in all 25 of its available colors. It's designed and formulated to meet the needs of the specialized consumer looking for maximum speed while painting.

The paint flow allows for clean, thick, solid lines with a wide spray diameter. Its performance is optimum in extreme temperatures, having been tested in below freezing as well as in very hot environments.

### FEATURES

- High pressure.
- Ultra Fast drying.
- Good hardening.
- Operates in extreme temperatures.
- Excellent flexibility.
- Strong resistance to scratching once the film is polymerized.
- Does not contain lead nor other heavy metals.
- Good covering capability.(Opacity)
- Color durability.
- Easy to apply and repaint.
- Good resistance to the elements.
- Very good resistance to UV light (See chart).
- Environmentally friendly.

### INSTRUCTIONS FOR USE

- Shake the aerosol well before using, approximately for one minute after hearing the sound of the mixer.
- Apply to clean, dry surfaces. On rusty metallic surfaces: Remove rust with a wire brush and prepare an anti-rust primer if considered necessary. Apply an anchor layer on plastics and polyesters.
- For best results apply in thin layers. Three thin layers are always better than one thick one, and may be repainted within fifteen minutes with the same paint.
- Turn the aerosol upside down to clean out the valve after use.  
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

### PHYSICAL PROPERTIES

High pressure:	Female valve
Propulseur:	GLP / Mix
Type de liant:	Modified alkyd
Color:	See chart
Shine 60° (ASTM D-523 ISO 2813):	15-25% matt
Dry to the touch (ASTM D-1640 ISO 1517):	10'
Completely dry (ASTM D-1640 ISO 1517):	24 h
Thickness of dry layer (ASTM D-823 ISO 2808):	15 micras/layer
Adherence (ASTM D-3359 ISO 2409):	0 B
Theoretical yield (continuous painting):	3,2 m² for 400 ml
Thinner:	Mix
Product life:	(Well Stored) 10 Years
Condition for application:	Minimum room temperature 8°C Surface temperature 5°C a 50°C Max humidity 85% R.H.P
Heat resistance of paint:	100°C

\* All of the adherence tests have been carried out on iron plates.

### APLICACIONES


Due to the characteristics of the product we recommend its use in circumstances that require speed while painting or when painting large surfaces. We highlight its matte finish and thick, solid, line potential. It's also interesting to point out that its matte quality prevents reflections in photography and art works. Specially designed and indicated for:

- Graffiti
- Street Art
- Muralismo
- Industria
- Señalización
- Rotulación

### IMAGEN



### LABEL

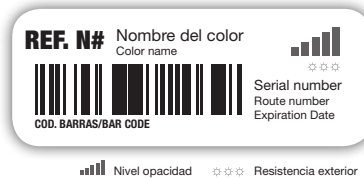


### CAP SYSTEM



### CAUTION



COLORES 25 Colores

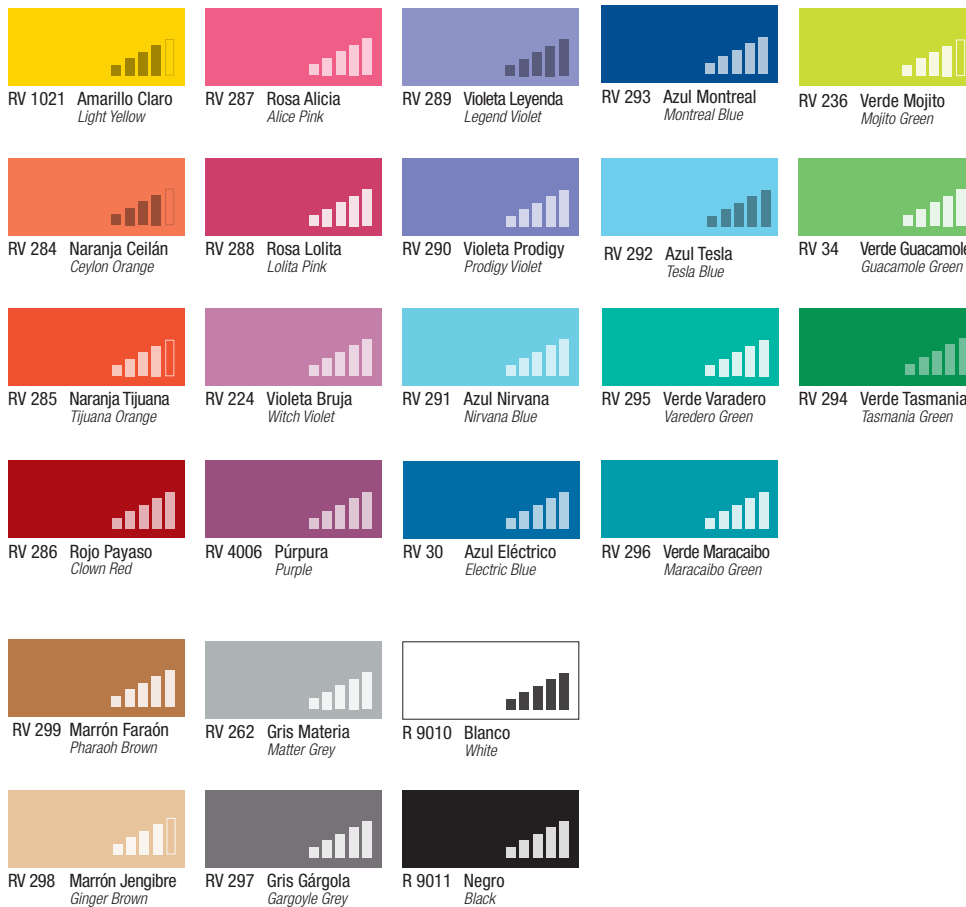

Opacity level / Nivel de opacidad

ENVASADO

Baja presión.  
 Capacidad nominal 400ml.  
 Resistencia del envase al calor : <50°C  
 Propelente: GLP – HC C3-C4

**Caja (6 unidades)**  
 205 X 140 X 200 mm.



Due to technical reasons this color chart might not reproduce the real colors. ©Montana Colors 2015